


# Product Information

## GIANT-TURBO | 084W

### Product structure

<b>Backing</b>	Fibre	
<b>Flexibility</b>		
<b>Grain Type</b>	Ceramic, precisely shaped	
<b>Coating</b>	semi open	
<b>Top Coat</b>	<input type="checkbox"/> stearate <input checked="" type="checkbox"/> special top coat	
<b>Manufactured Width</b>	<input type="checkbox"/> 1400mm <input type="checkbox"/> 1430mm <input type="checkbox"/> 1650mm <input checked="" type="checkbox"/> others	
<b>Form</b>		
<b>Suitable for</b>	<input type="checkbox"/> hand sanding <input checked="" type="checkbox"/> hand held machine sanding or grinding <input type="checkbox"/> machine sanding or grinding	



### Grits


Ceramic, zirconia, # and \* = non P-Grits

<input type="checkbox"/> P 12	<input type="checkbox"/> P 16	<input type="checkbox"/> P 24	<input type="checkbox"/> P 30	<input checked="" type="checkbox"/> 36	<input type="checkbox"/> P 40	<input type="checkbox"/> P 50	<input type="checkbox"/> P 60	<input type="checkbox"/> P 80	<input type="checkbox"/> P 100	<input type="checkbox"/> P 120	<input type="checkbox"/> P 150	<input type="checkbox"/> P 180	<input type="checkbox"/> P 220	<input type="checkbox"/> P 240
<input type="checkbox"/> P 280	<input type="checkbox"/> P 320	<input type="checkbox"/> P 360	<input type="checkbox"/> P 400	<input type="checkbox"/> P 500	<input type="checkbox"/> P 600	<input type="checkbox"/> P 800	<input type="checkbox"/> P 1.000	<input type="checkbox"/> P 1.200	<input type="checkbox"/> P 1.500	<input type="checkbox"/> P 2.000	<input type="checkbox"/> P 2.500	<input type="checkbox"/> ST 3.000	<input type="checkbox"/> ST 6.000	<input type="checkbox"/> ST 8.000

### Materials

Aluminium	Non-ferrous Metal	Stainless steel	Steel	Titanium	Paint lacquer	Glass	Wood	Plastics	Stone/china
-----------	-------------------	-----------------	-------	----------	---------------	-------	------	----------	-------------

### Application examples

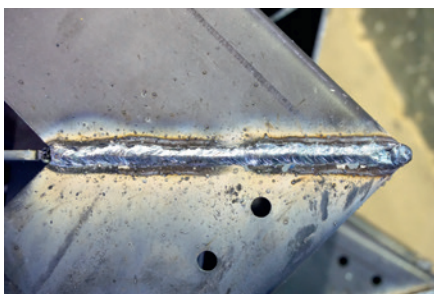

Grinding of welding seams



Trimming of steel plates for welding



Deburring of iron casting workpieces

- Extremely high cut-off rate due precisely shaped high-performance ceramic grain
- Excellent power-transmission by the very stiff fibre backing
- Long service life by advanced top-size cooling coat

